

# Schall-Ex® Applic A

## DETAILS

Articlenumber	1-658
Function	hinged door
Türenmaterial	timber, PVC
Application	internal door
Usage	sound protection, smoke protection, fire protection, accessibility

## TECHNICAL DATA


Width	14.5 mm
Height	46 mm
Min. delivery length	235 mm
Max. delivery length	1333 mm
Standard length	805, 930, 1055 mm
max. travel	11 mm
Actuation	single-sided
Actuator	Auslösefalle
Outerprofile	aluminium
Surface	silver anodized (C-0)
Sealingprofile	silicone, self-extinguishing

## FITTING

Fixing	FS - Front/Fläche-Schrauben Spanplattenschraube 3,5x32
Pressureplate	248

## EXAMINATIONS AND CERTIFICATES

Sound	yes
Permanent function 200k	yes
Leakage rate certificate	yes
Barrier free	yes
UL	yes
EPD	yes
REACH	yes

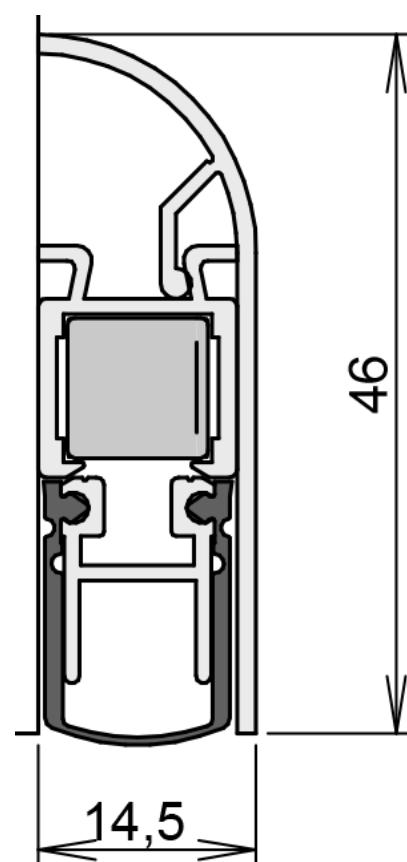

# Schall-Ex® Applic A

