Stadi L-24/20 WS

/ modular system door seal


/ parallel drop, to minimise friction with the floor

/ no inner rail offset

/ standard overload protection

/ high sound insulation value up to 54 dB

/ optional set-up for flush bolts including concealed version

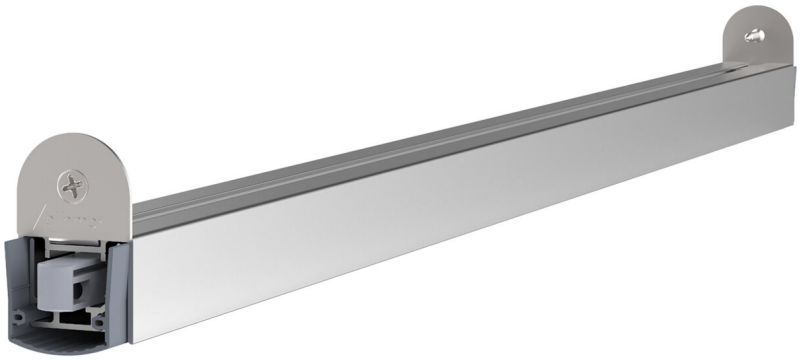

APPLICATION

usability	accessibility, fire protection, smoke protection, sound insulation
aplication area	exterior door, interior door
door type	hinged door
door leaf material	timber, PVC, metal
opening direction	DIN L or R
door leaf	single leaf, double leaf

TECHNICAL DATA

concealed flush bolt hole	suitable for diameter of 10 mm flush bolt
flush bolt	yes
carrier material	aluminium
surface	mill finish
surface colour	silver
actuator	sliding acutator
actuation	single
clipable actuator	yes
joint sound insulation	54 dB
floor gap	7 mm
sealing profile material	self-extinguishing silicone
sealing profile colour	grey
parallel drop	yes

athmer oHG / Sophienhammer / 59757 Arnsberg
T +49 2932 477-500 / info@athmer.com / athmer.com

Stadi L-24/20 WS

DIMENSIONS

width	24 mm
height	20 mm
travel max.	16 mm
fixed lengths available	yes
length min.	230 mm
length max.	2000 mm
cutback information	min. delivery length cannot be cut back
standard lengths	1050 mm, 1200 mm, 750 mm, 900 mm
cutback std. lengths	150 mm


INSTALLATION

fixing	WS - fixing brackets
press plate required	yes
installation	in-groove
maintenance-free	yes
adjustment without tools	yes
accessories incl.	5302


TESTS / CERTIFICATES

abZ	Z-6.100-2530
accessible	P1B050 DIN CERTCO
Certifire	CF5675
test cycles	1,000,000
EPD	EPD-ATD-36.1
corrosion note	corrosion test according to DIN EN 1670 class 5
corrosion test	120004365.23
MPA Qualitylabel	MPA NRW-00708-01 (Vers. 2)
MPA certificate	120005219-20-101 Rev. 01
sound insulation certificates	16-003975-PR02 PB 03-K06-04-de-01
UL	UL10C (R38166) Category H

TECHNICAL DRAWING

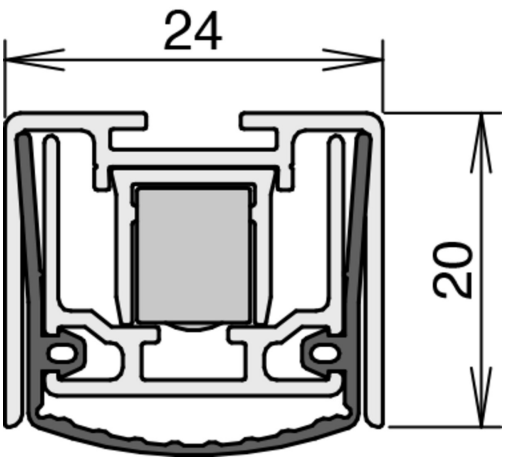


TECHNICAL DRAWING

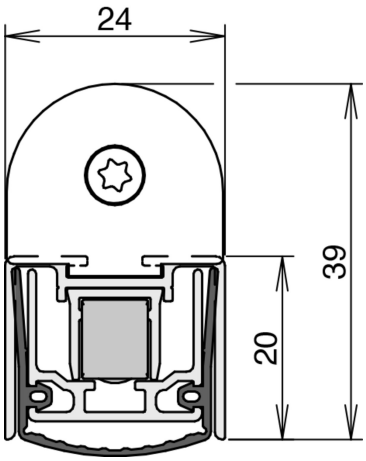

athmer oHG / Sophienhammer / 59757 Arnsberg
T +49 2932 477-500 / info@athmer.com / athmer.com

Stadi L-24/20 WS

INSTALLATION DRAWING

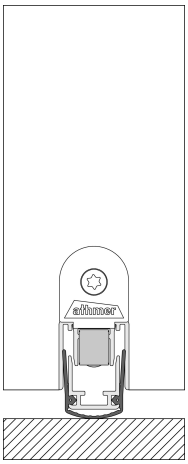

ART. NO.

1-938

athmer oHG / Sophienhammer / 59757 Arnsberg
T +49 2932 477-500 / info@athmer.com / athmer.com