


205473 - DK Getriebe MM 1950 DM30 fix mit 3 i.S. FFH 1.701-1.950 GM1.050 Silber

Technische Zeichnung

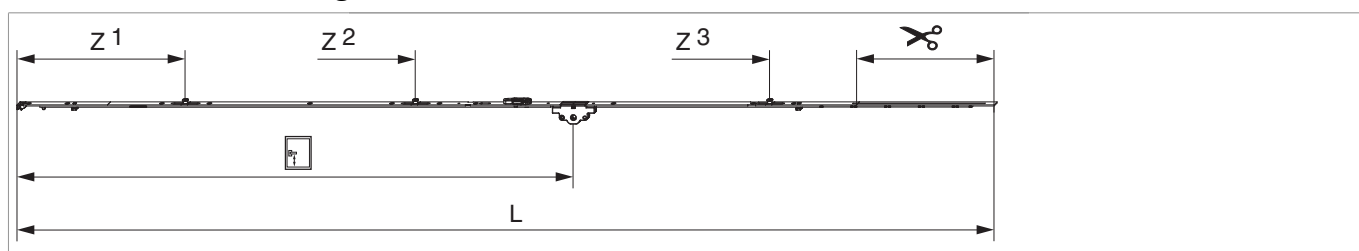

		L							Nº
Silber	1950	1.846,5	30	1.050	1.701 - 1.950	260,5	1	10	205473

Schraubpositionstabelle

Nº		1	2	3	4	5	6	7	8	9	10	11	12	13	14
205473	11	18,5	91,5	270	360	550	705	795	863,5	1.124	1.388	1.465			


Zapfensitztable

Nº		Z1	Z2	Z3	Z4	
205473	3	315	750	1.420		

Lehren


			Nº
Bohrlehre für Türgetriebe sperrbar DM 25-50 mm	Profilbreite bis 110 mm	1	214634

Abmessungen Getriebekasten

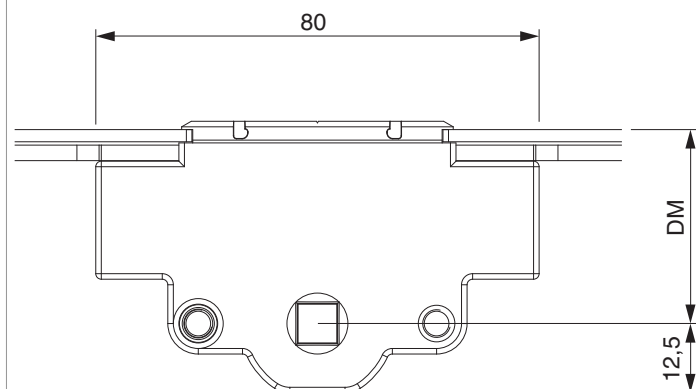


Bohrbild

Für Holz-, Kunststoff- und Aluminiumfenster

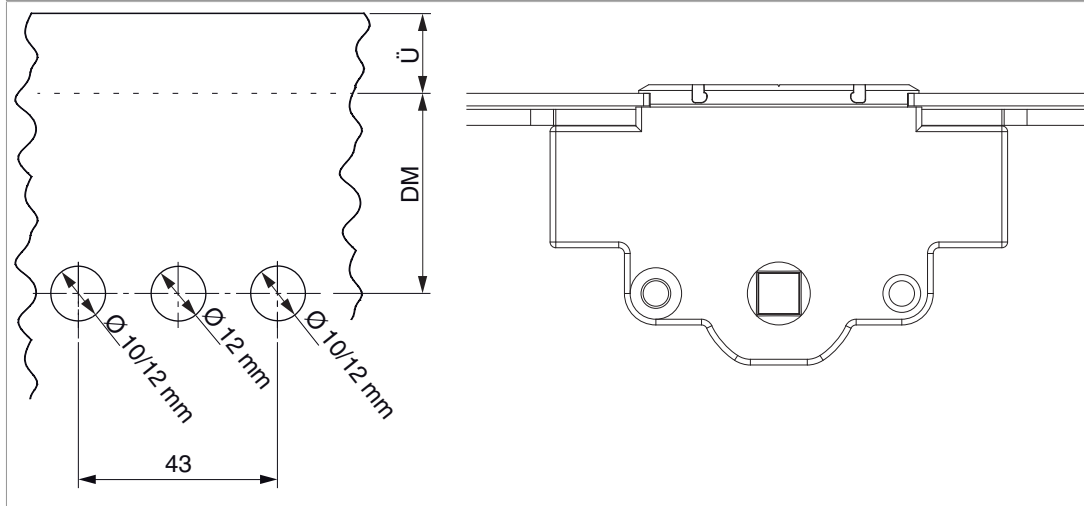




Stanzbild

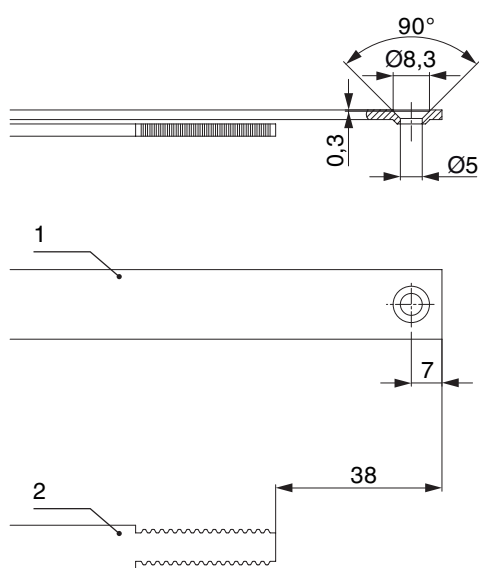

1. Stulp
2. Riegel


Positionierung Hebeteile

Hebeteile 4L / ohne Türschnapper

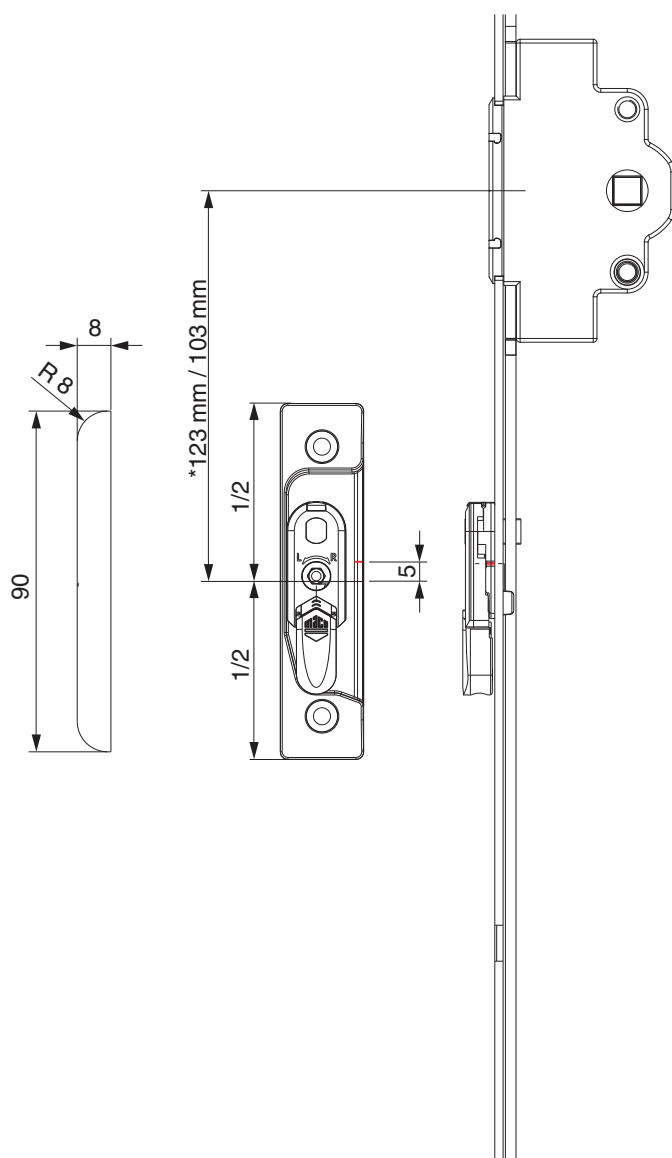


* bei Getriebegröße 660

12 mm Falzluft

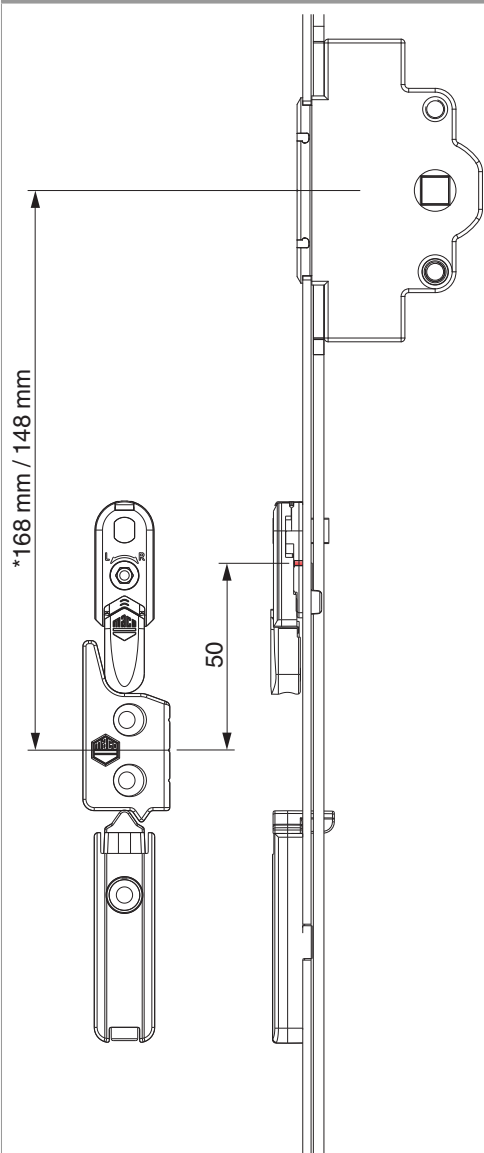


* bei Getriebegröße 660

Ausschwenken und Einstellen der Hebesicherung

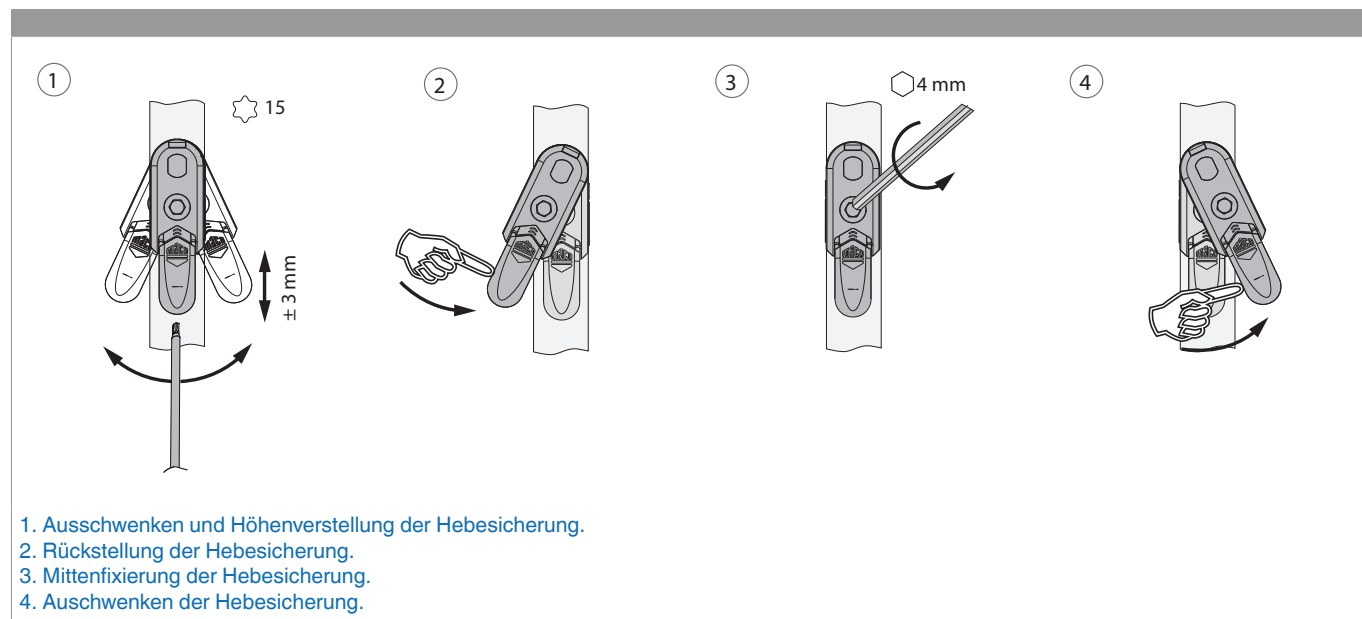


Klipsverbindung


Klipsverbindung einhängen

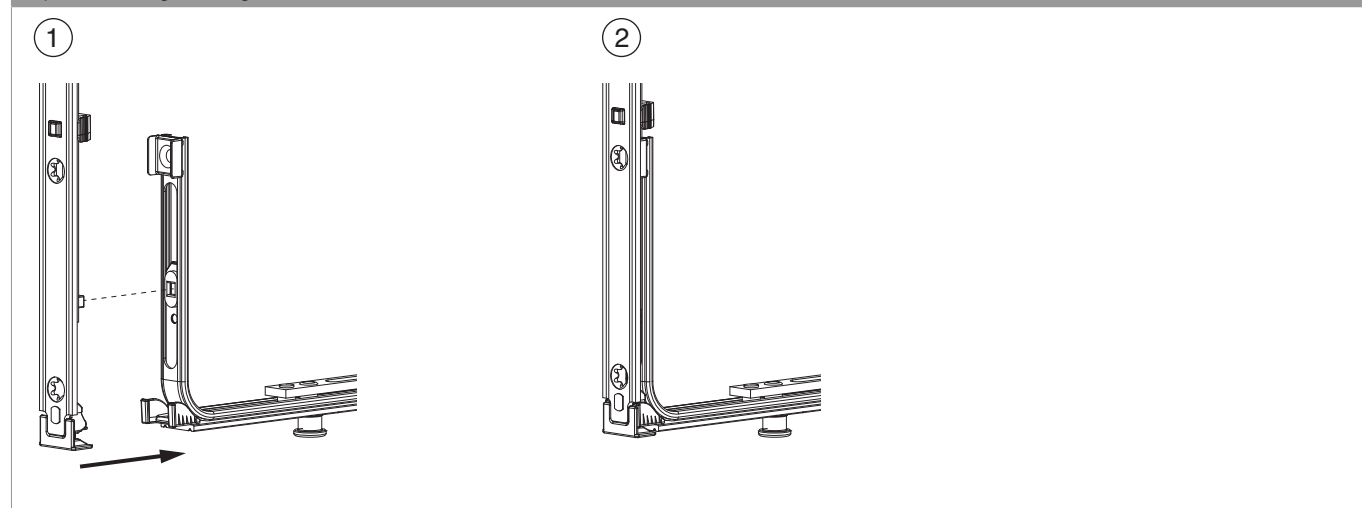

Klipsverbindung aushängen

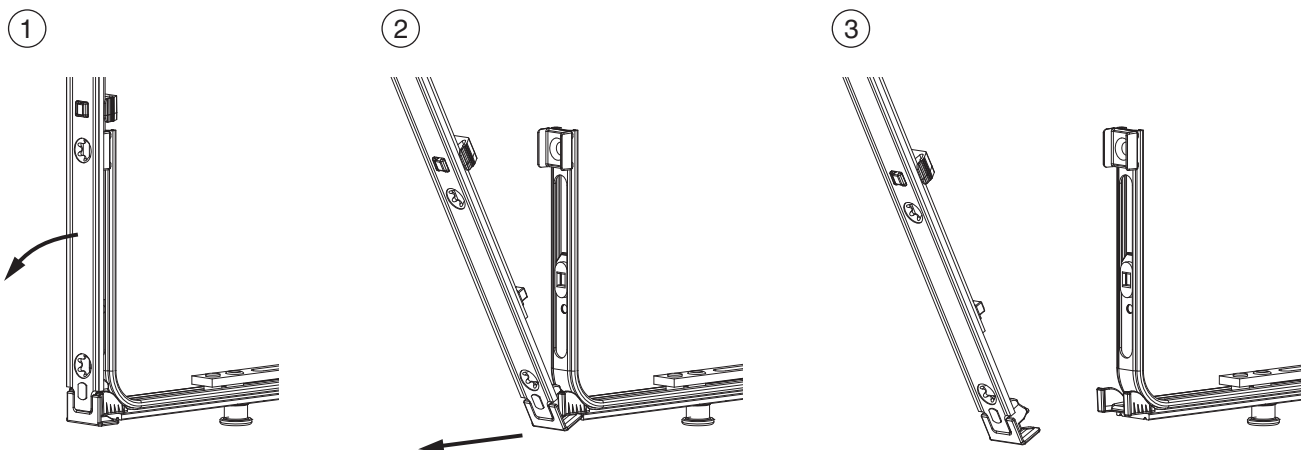

Zahnkassenverbindung

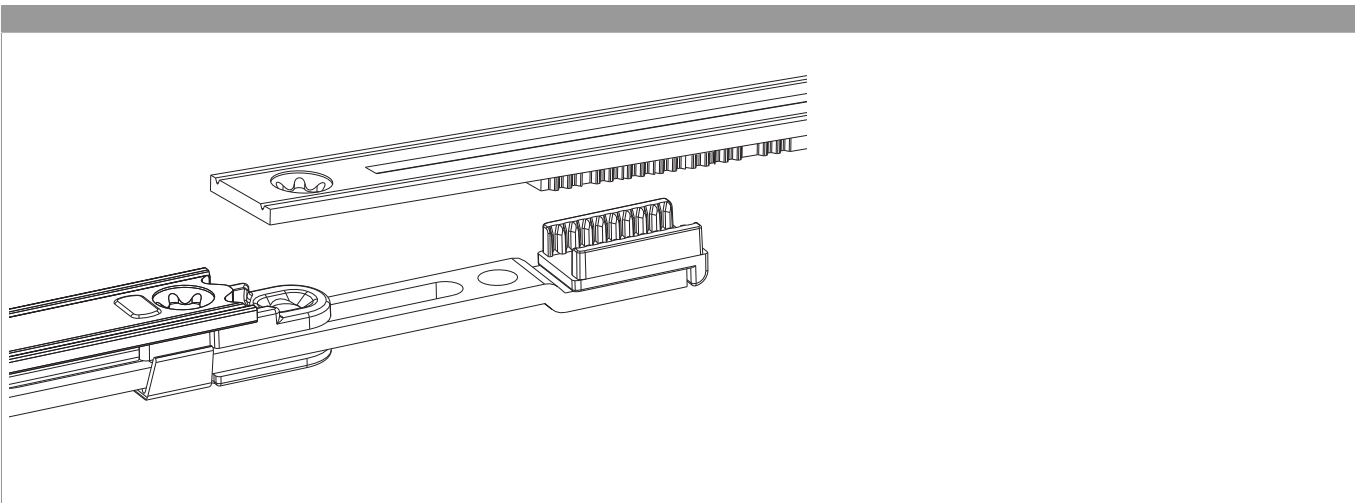

Anpressdruckregulierung

i.S Zapfen und Verschlusszapfen

