


205488 - DK Getriebe MM 2450 DM35 fix mit 4 i.S. FFH 2.201-2.450 GM1.050 Silber

Technische Zeichnung

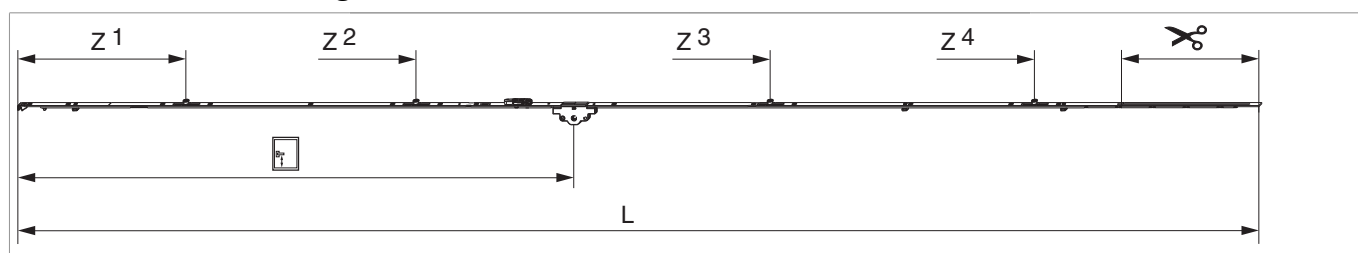

		L							Nº
Silber	2450	2.346,5	35	1.050	2.201 - 2.450	260,5	1	10	205488

Schraubpositionstabelle

Nº		1	2	3	4	5	6	7	8	9	10	11	12	13	14
205488	14	18,5	91,5	270	360	550	705	795	863,5	1.124	1.388	1.465	1.685	1.875	1.965


Zapfensitztable

Nº		Z1	Z2	Z3	Z4	
205488	4	315	750	1.420	1.920	

Lehren


			Nº
Bohrlehre für Türgetriebe sperrbar DM 25-50 mm	Profilbreite bis 110 mm	1	214634

Abmessungen Getriebekasten

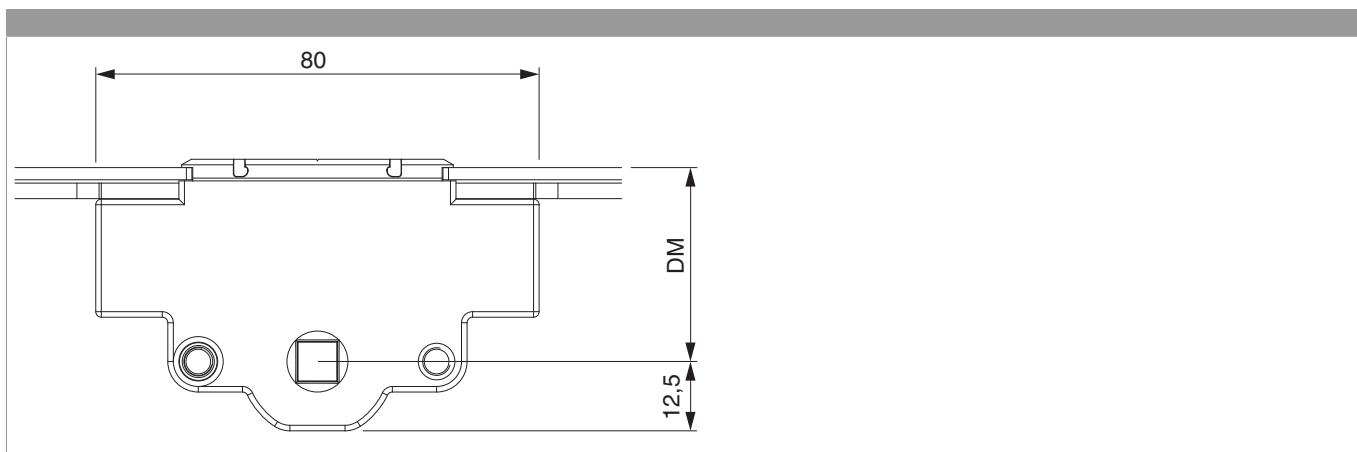


Bohrbild

Für Holz-, Kunststoff- und Aluminiumfenster

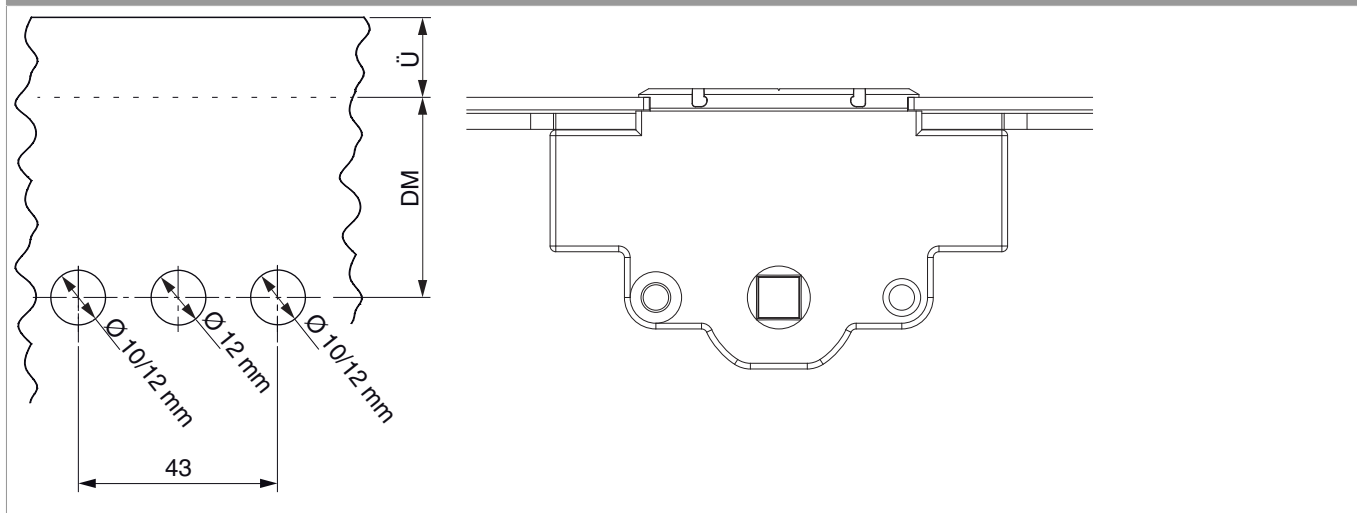




Stanzbild

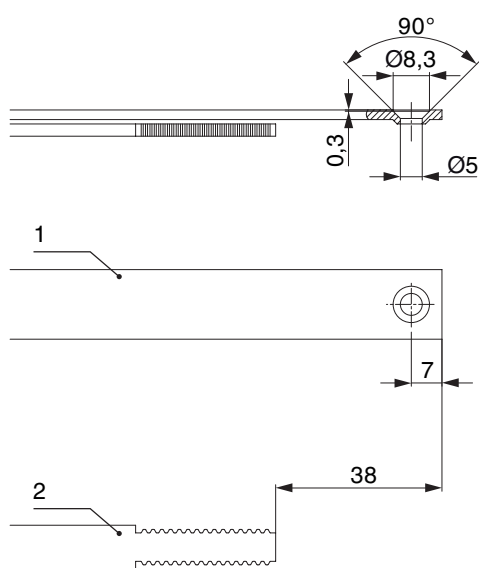

1. Stulp
2. Riegel


Positionierung Hebeteile

Hebeteile 4L / ohne Türschnapper

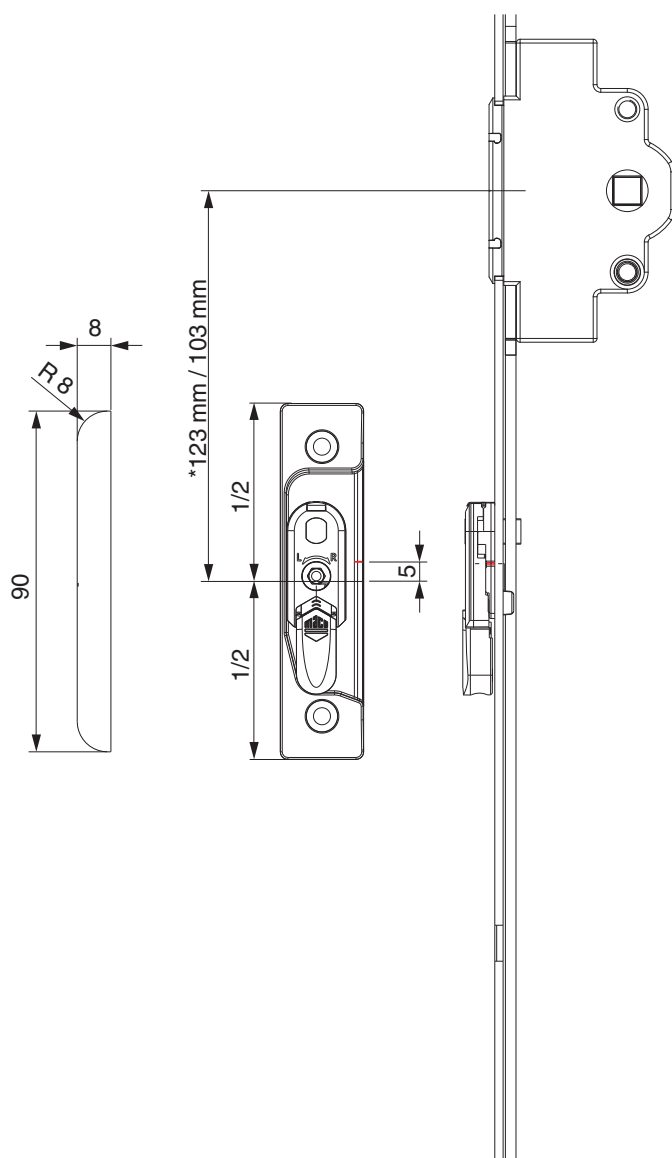


* bei Getriebegröße 660

12 mm Falzluft

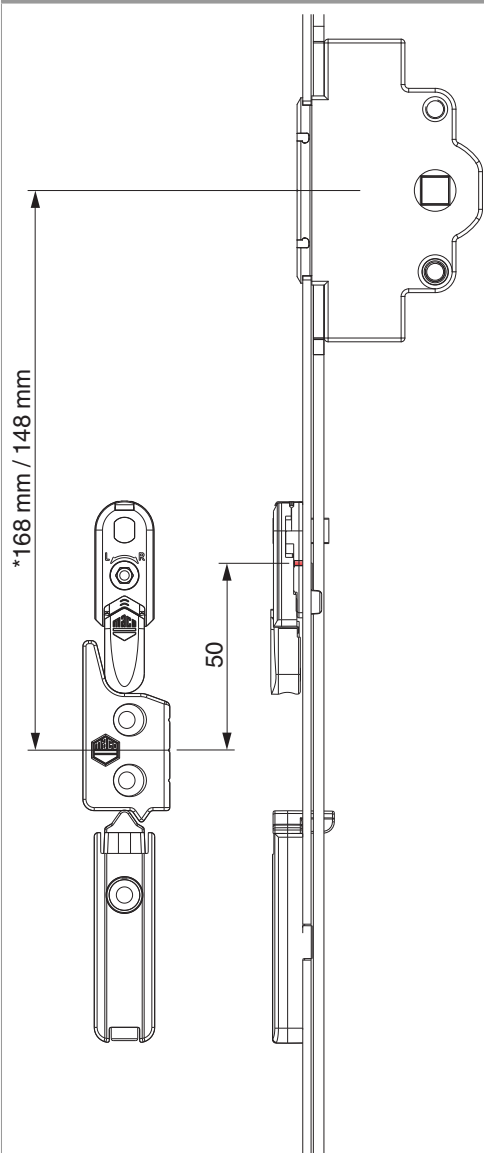


* bei Getrießgröße 660

Ausschwenken und Einstellen der Hebesicherung

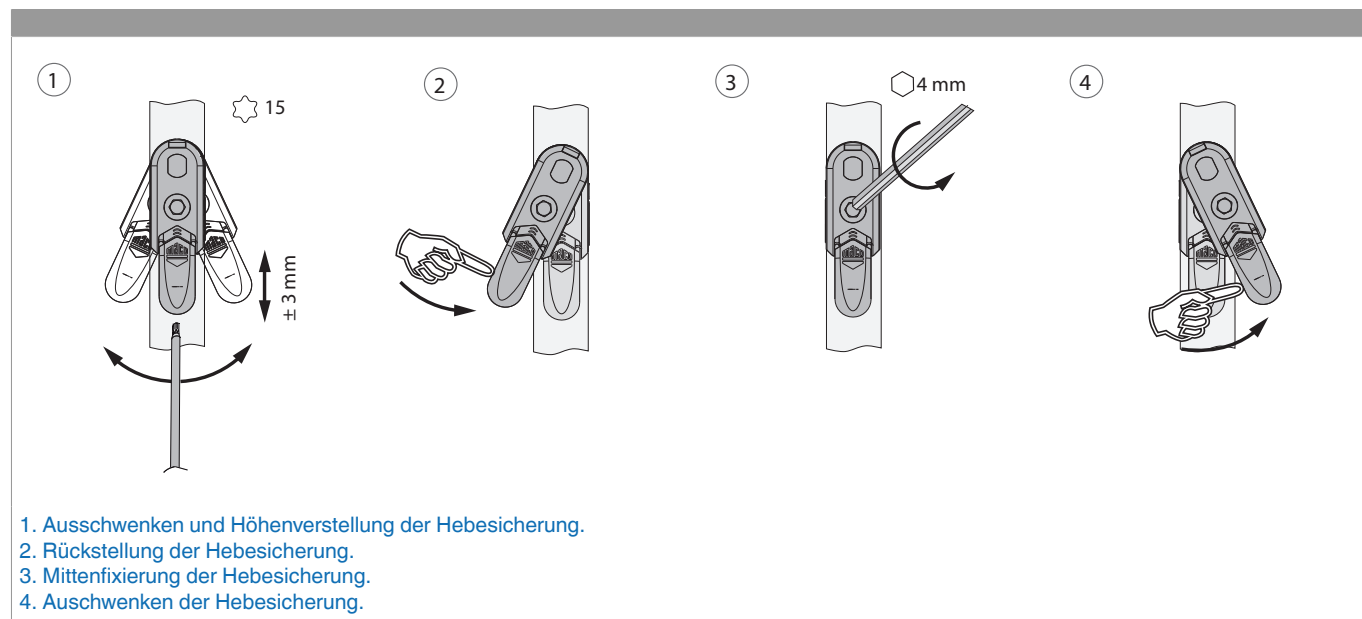


Klipsverbindung


Klipsverbindung einhängen

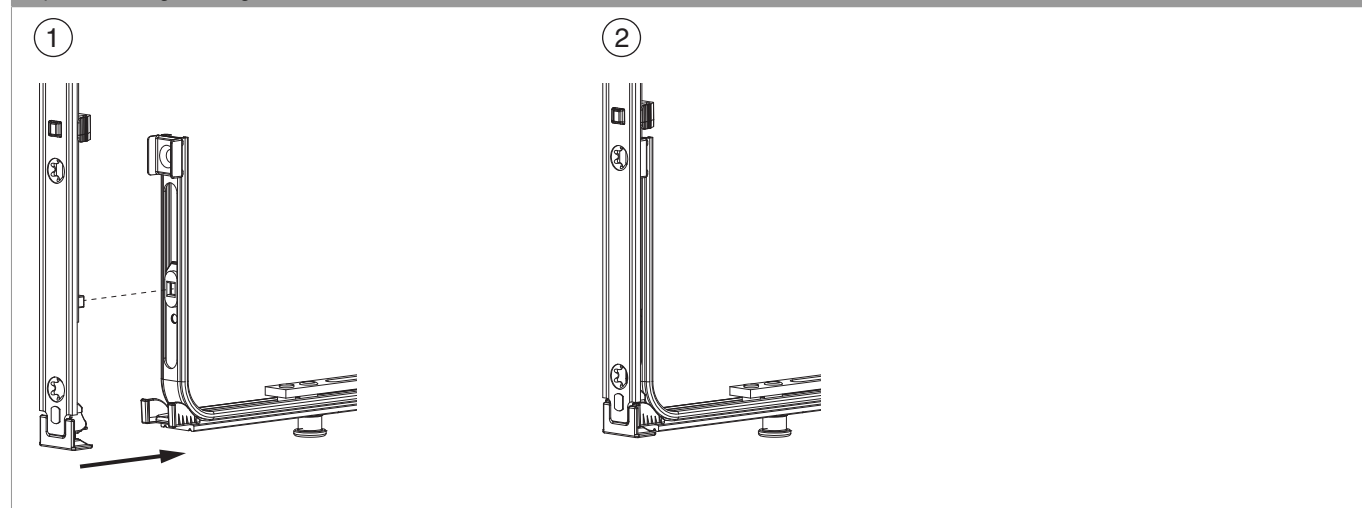

Klipsverbindung aushängen

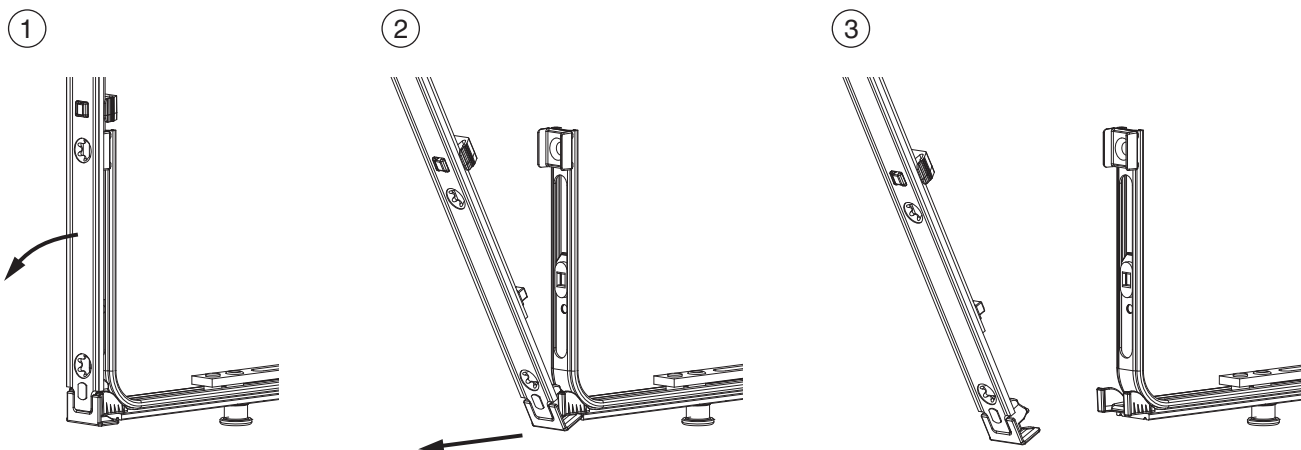

Zahnkassenverbindung

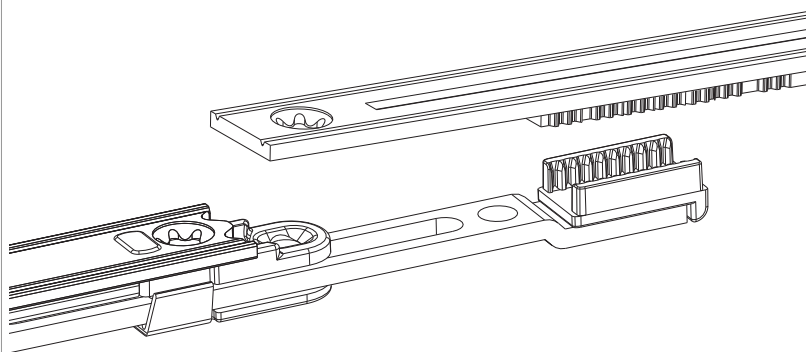

Anpressdruckregulierung

i.S Zapfen und Verschlusszapfen

