




210943 - turn-only drive gear MM with welded-on striker 2200 BS40 fixed handle height SRH 1.951-2.200 GM1.050 silver

Technical drawing

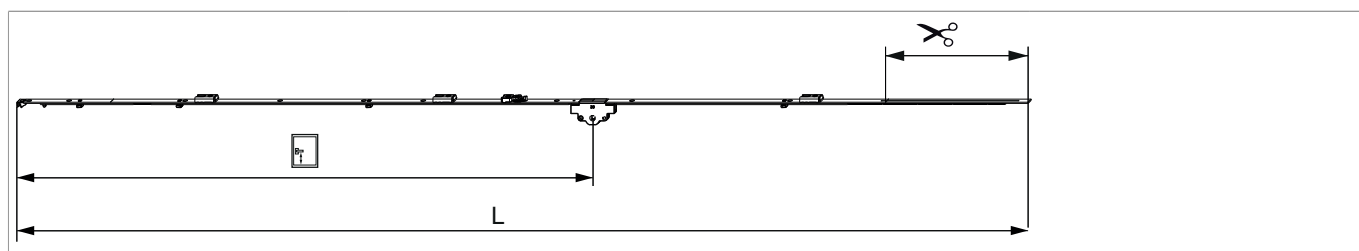


						L		Nº
silver	2200	40	1.050	1.951 - 2.200	260,5	2.096,5	10	210943

Screw position table

Nº		1	2	3	4	5	6	7	8	9	10	11	12	13	14
210943	12	18,5	91,5	270	349,5	550	705	784,5	863,5	1.124	1.388	1.455	1.729		

Gearbox dimensions

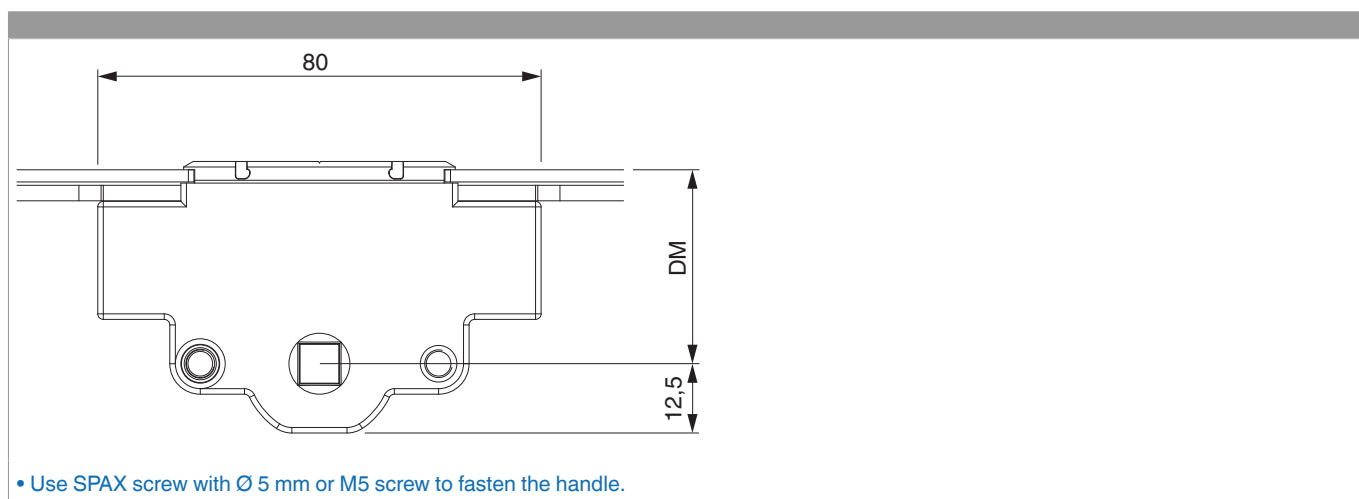





210943 - turn-only drive gear MM with welded-on striker
2200 BS40 fixed handle height SRH 1.951-2.200 GM1.050
silver

Drilling hole pattern

For timber, PVC and aluminium windows

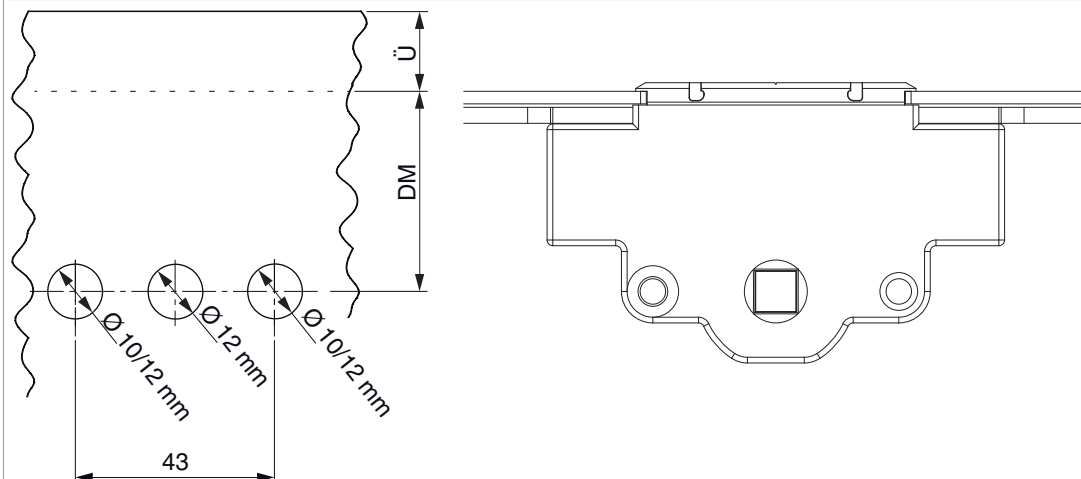

Punch pattern

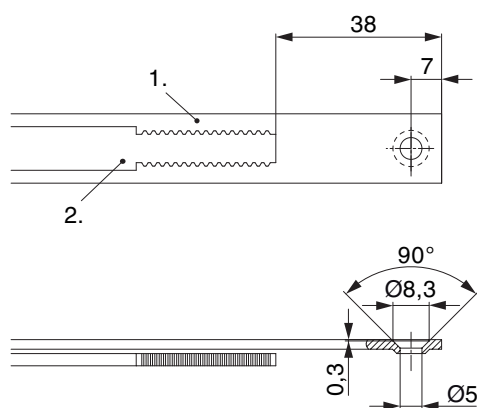

- We recommend re-treating the cropped edges of Tricoat-Evo fittings with the Tricoat-Evo touch-up paint (item no. 373439).


1. Faceplate
2. Drive track




210943 - turn-only drive gear MM with welded-on striker
2200 BS40 fixed handle height SRH 1.951-2.200 GM1.050
silver

Snap joint

Engage snap joint

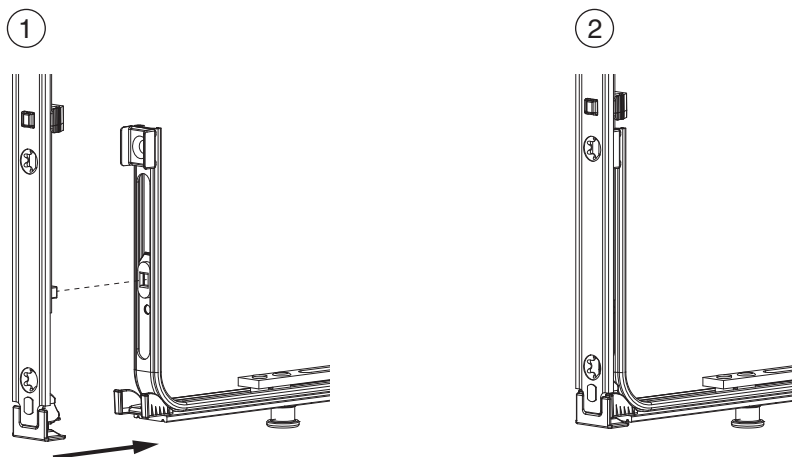


Disengage snap joint

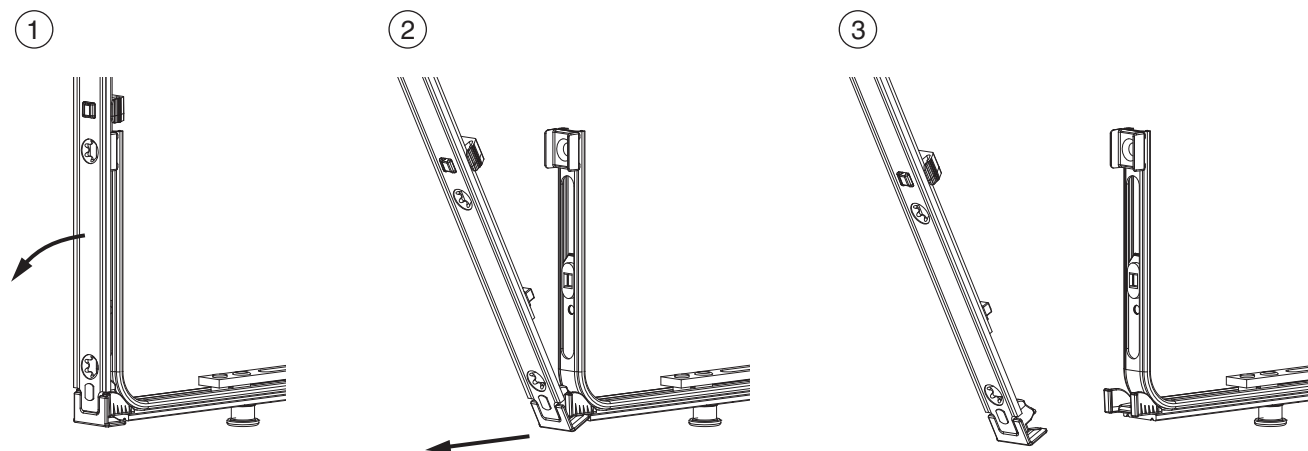




210943 - turn-only drive gear MM with welded-on striker
2200 BS40 fixed handle height SRH 1.951-2.200 GM1.050
silver

Serrated carrier connection

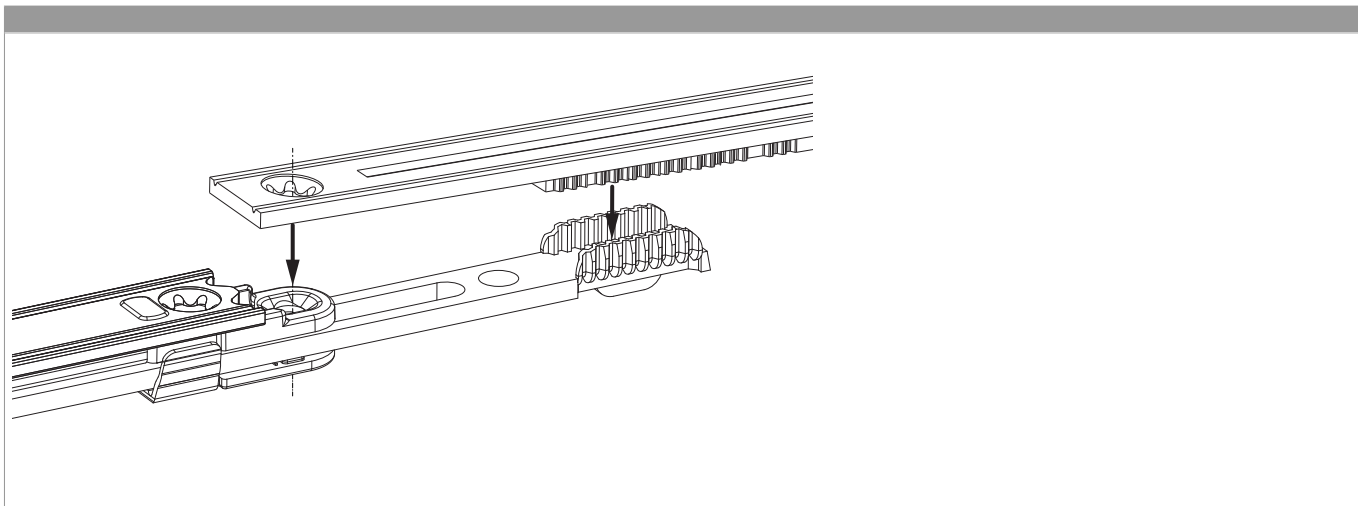

Installation

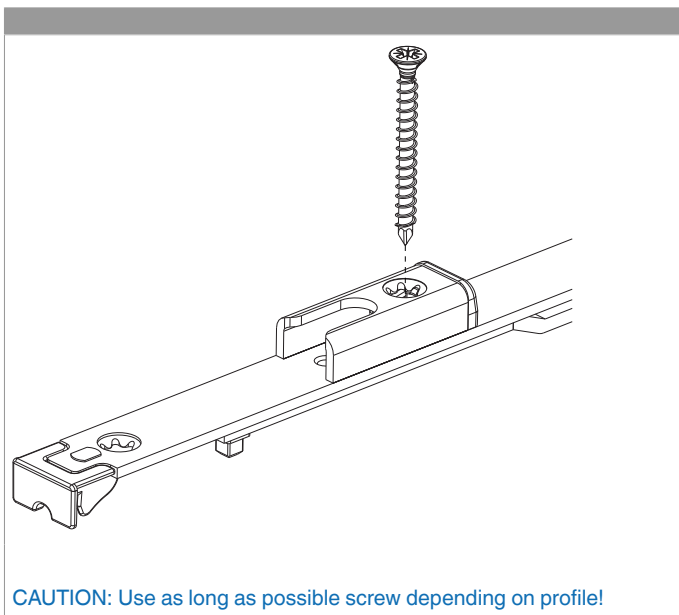

CAUTION: Use as long as possible screw depending on profile!



210943 - turn-only drive gear MM with welded-on striker
2200 BS40 fixed handle height SRH 1.951-2.200 GM1.050
silver

Function of sash lifter on French casement drive gear

