




## 228125 - French casement drive gear for HS hook drive gear 150/300/400kg BS 37,5 GM 1.000 SRH 1.835-2.860 L=2.300 silver PC

### Technical drawing

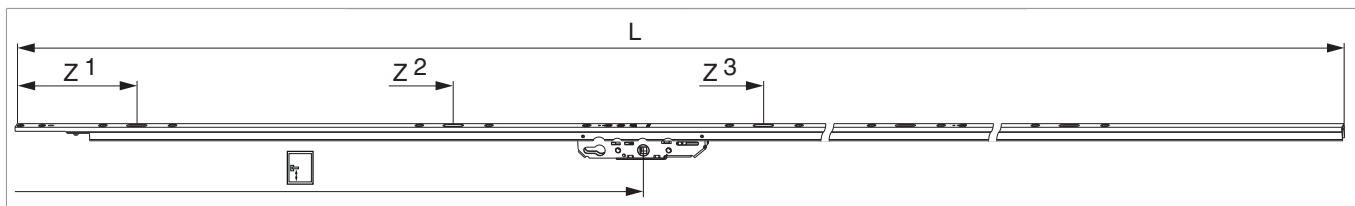

				<b>L</b>			<b>Nº</b>
silver	French casement drive gear for HS hook drive gear	1.835 - 2.860	1.000	2.300	10	5	228125 <sup>1)</sup>

<sup>1)</sup> The application ranges apply only if a flat roller track is used with universal low guide frame with cover. If the high roller is used, the application ranges are increased by 10 mm.

### Screw position table

Nº		1	2	3	4	5	6	7	8	9	10
228125	10	152	262	740	850	1.152	1.262	1.620	1.730	2.052	2.162

### Warning



#### RISK OF INJURY DUE TO NON-OBSERVANCE OF THE PROCESSING INSTRUCTIONS!

Without a drive gear damper, minor to serious injuries may occur when operating the system.

From a sash weight of 200 kg, the use of a drive gear damper is **STRONGLY** recommended.