




## 210340 - height connector SKB-S/SE MM 2200 with 3 i.S. SRH 1.951-2.200 silver

### Technical drawing

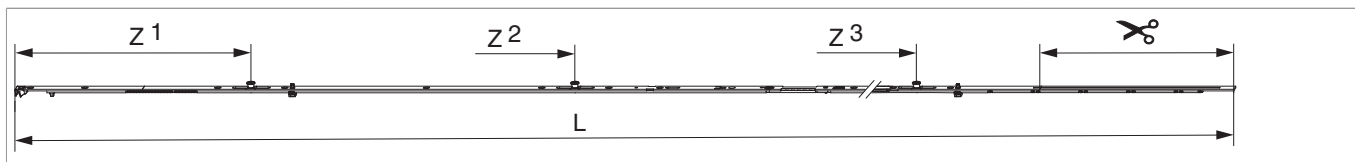

				<b>L</b>			<b>Nº</b>
silver	with 3 i.S.	2200	260	2.096,5	1.951 - 2.200	10	<a href="#">210340</a>

### Screw position table

<b>Nº</b>		1	2	3	4	5	6	7	8	9	10	11	12	13	14
<a href="#">210340</a>	12	18,5	91,5	270	360	550	705	795	863,5	1.124	1.388	1.465	1.729		


### Cam position table

<b>Nº</b>		Z1	Z2	Z3	Z4
<a href="#">210340</a>	3	315	750	1.420	




210340 - height connector SKB-S/SE MM 2200 with 3 i.S.  
SRH 1.951-2.200 silver

Installation

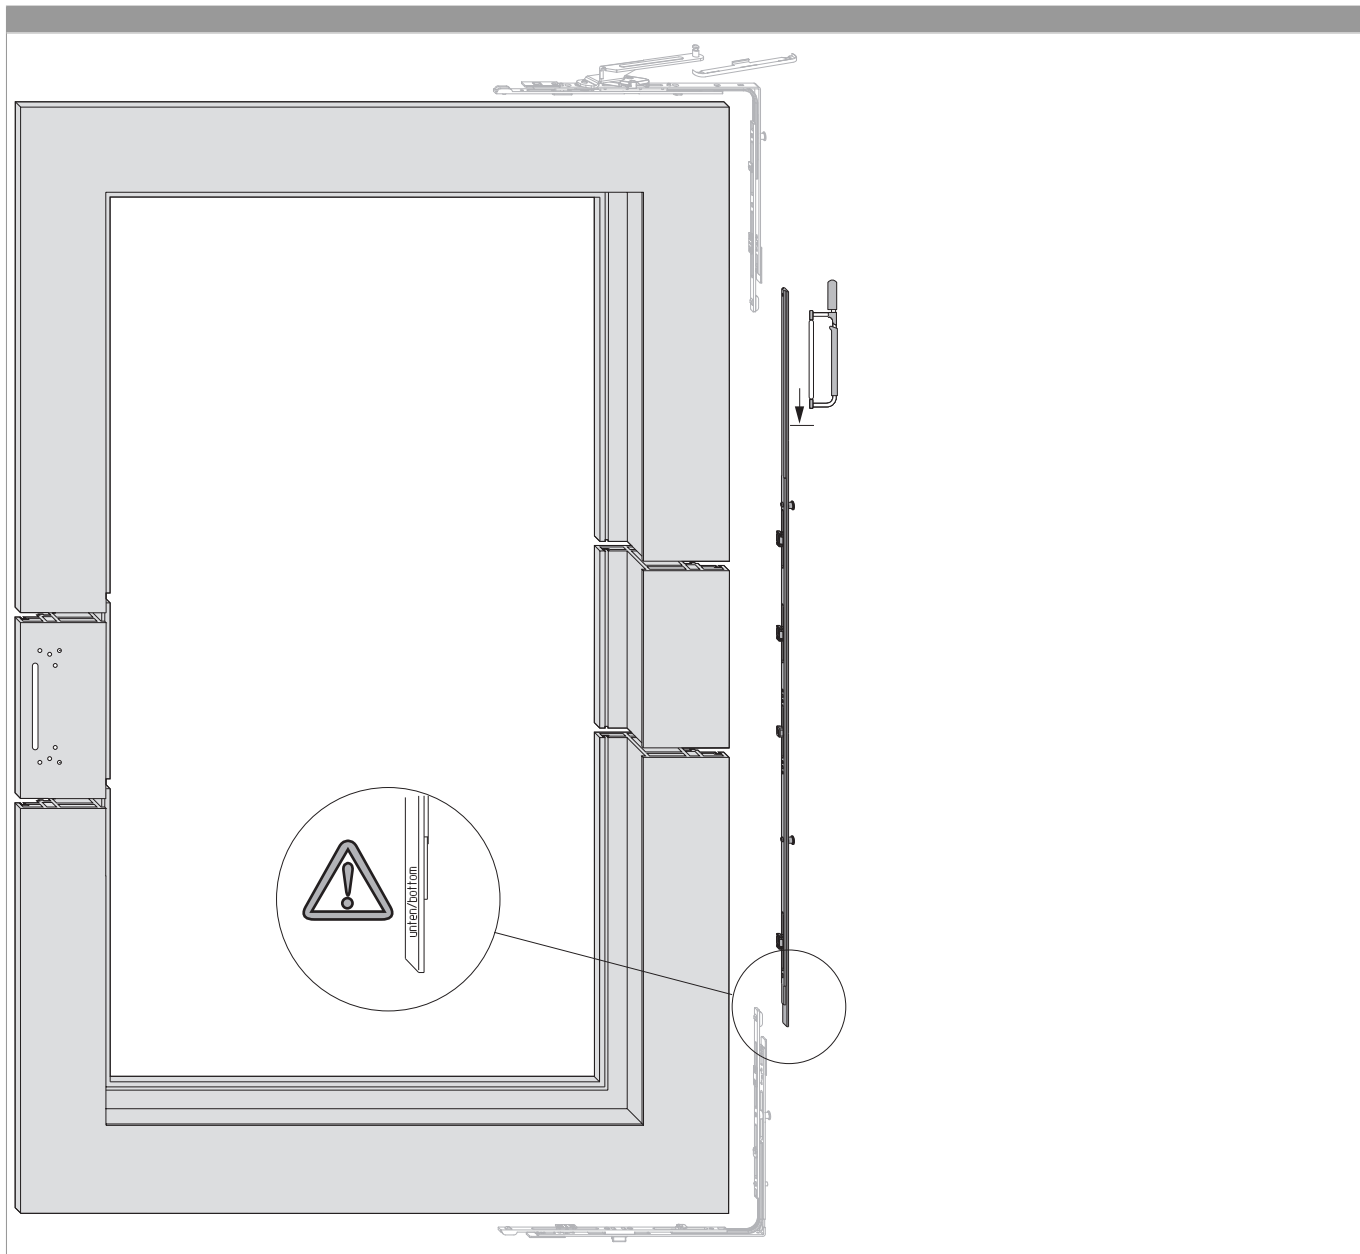



210340 - height connector SKB-S/SE MM 2200 with 3 i.S.  
SRH 1.951-2.200 silver




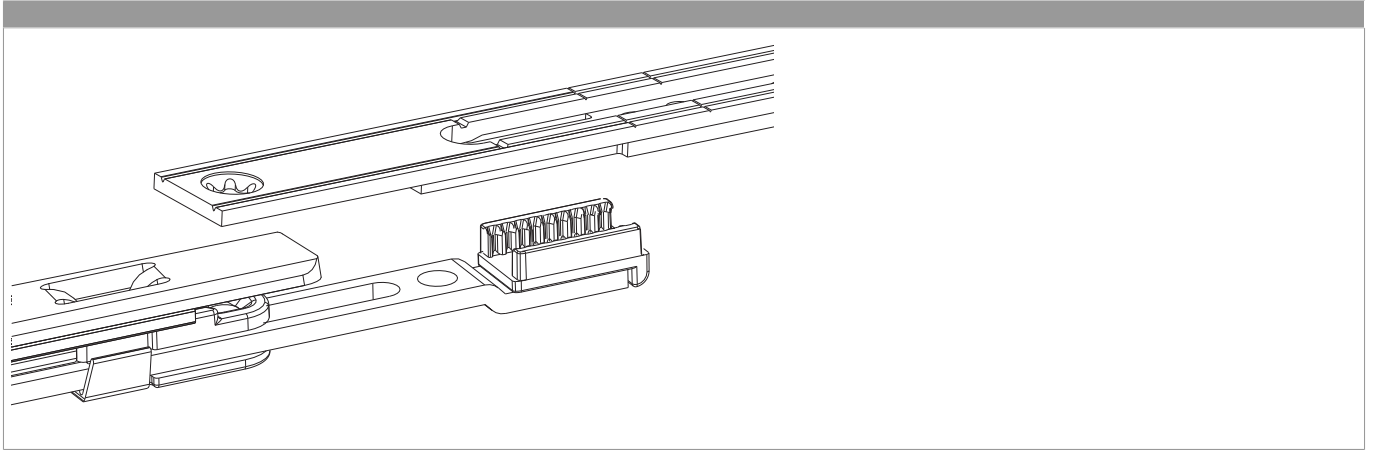




210340 - height connector SKB-S/SE MM 2200 with 3 i.S.  
SRH 1.951-2.200 silver

### Gasket compression adjustment

i.S. locking cams and standard locking cams

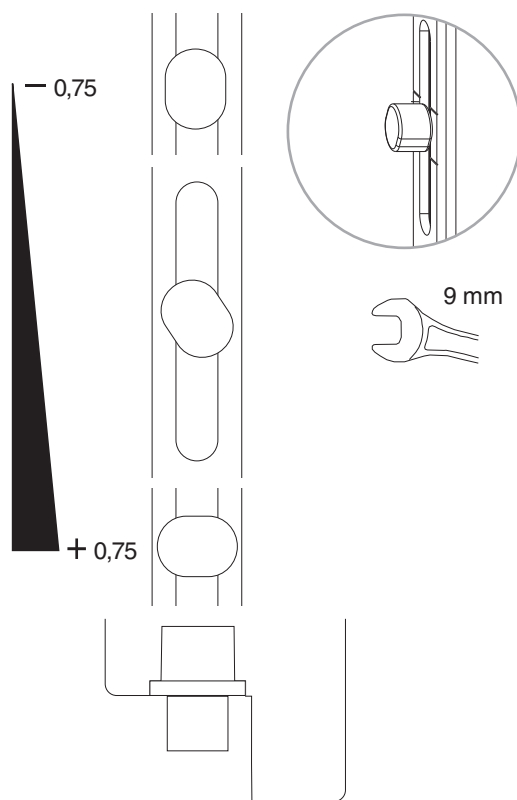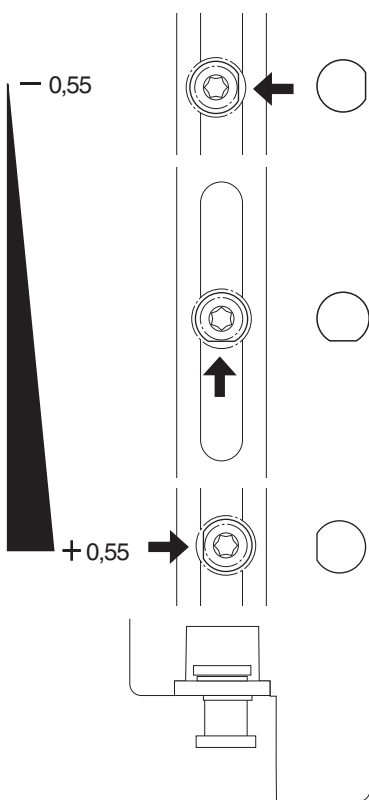

• only for sizes 1,050 and 1,300