


210341 - height connector SKB-S/SE MM 2450 with 4 i.S. SRH 2.201-2.450 silver

Technical drawing

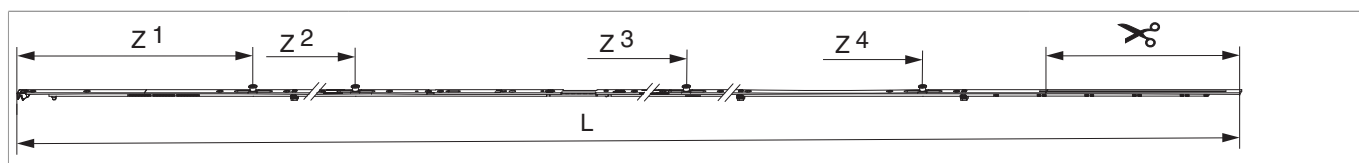

				L			Nº
silver	with 4 i.S.	2450	260	2.346,5	2.201 - 2.450	10	210341

Screw position table

Nº		1	2	3	4	5	6	7	8	9	10	11	12	13	14
210341	14	18,5	91,5	270	360	550	705	795	863,5	1.124	1.388	1.465	1.685	1.875	1.965


Cam position table

Nº		Z1	Z2	Z3	Z4	
210341	4	315	750	1.420	1.920	




210341 - height connector SKB-S/SE MM 2450 with 4 i.S. SRH 2.201-2.450 silver

Installation

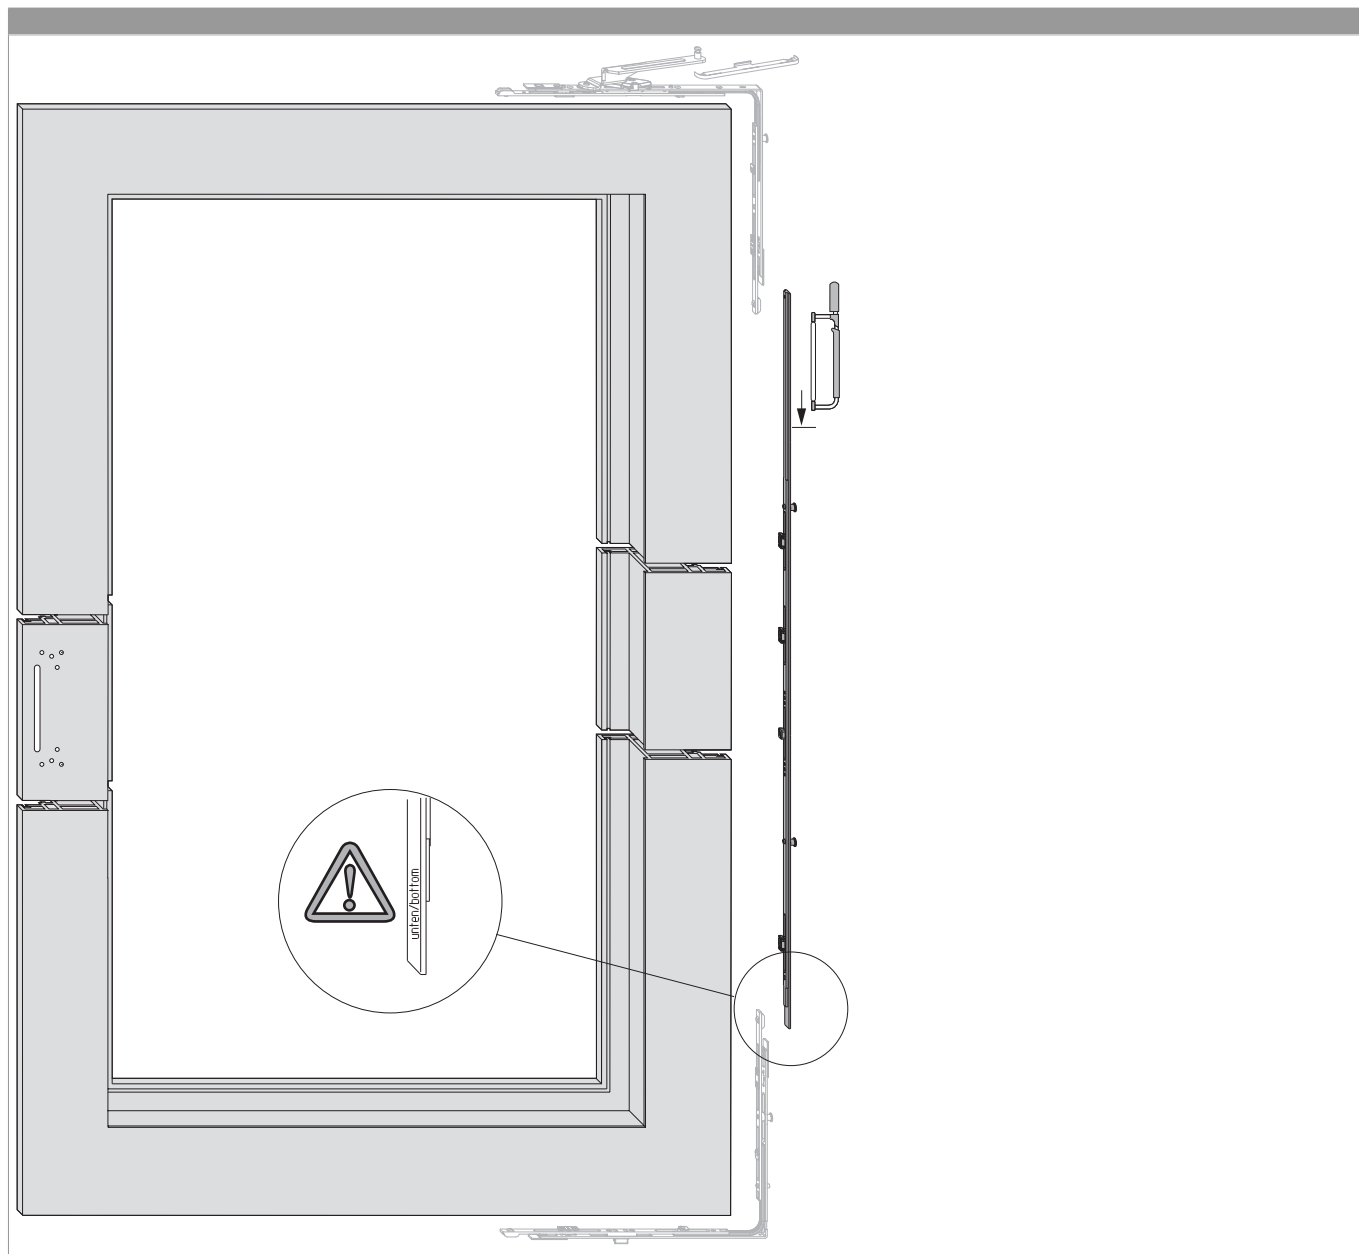







**210341 - height connector SKB-S/SE MM 2450 with 4 i.S.
SRH 2.201-2.450 silver**

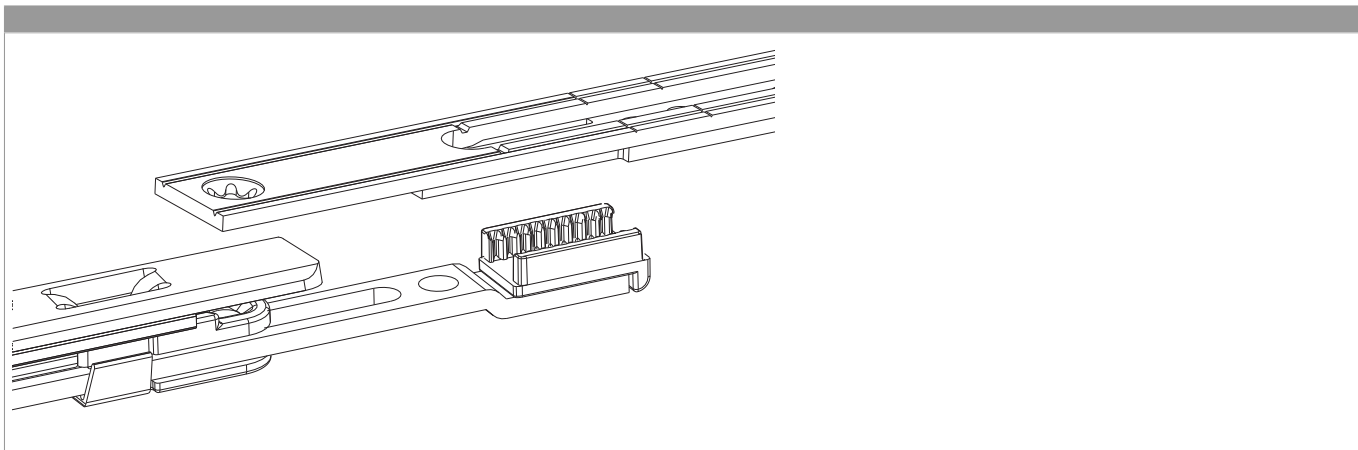

Gasket compression adjustment

i.S. locking cams and standard locking cams

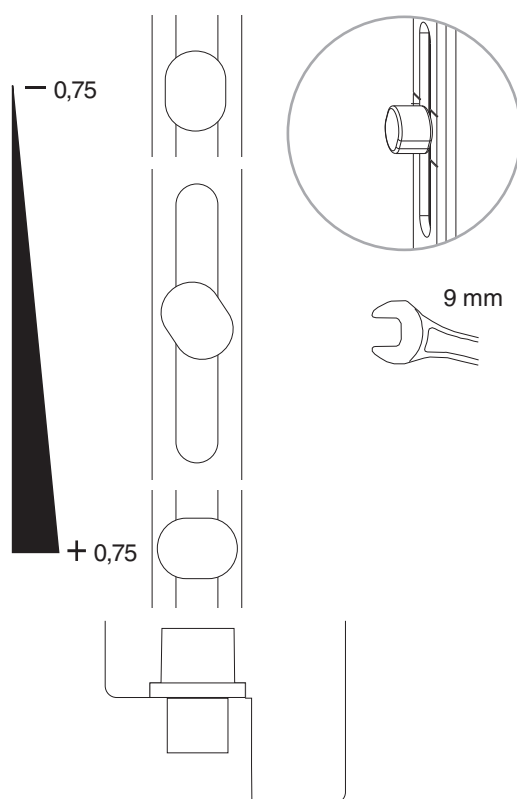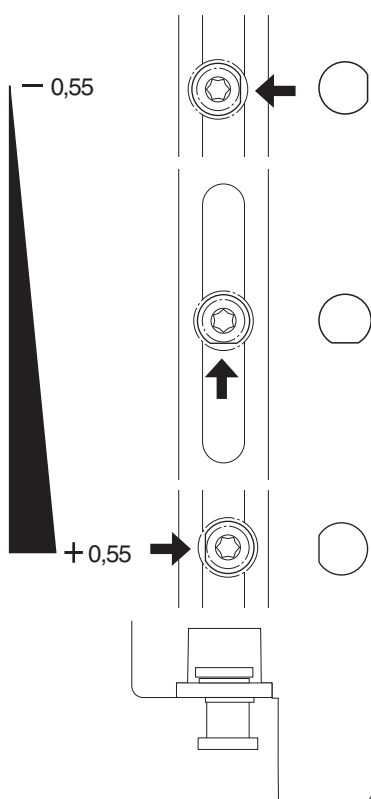

• only for sizes 1,050 and 1,300