




209471 - threaded surface mounted shutter pin SK15 BLR without lateral adjustment L125 distance 70-110 black-S

Technical drawing

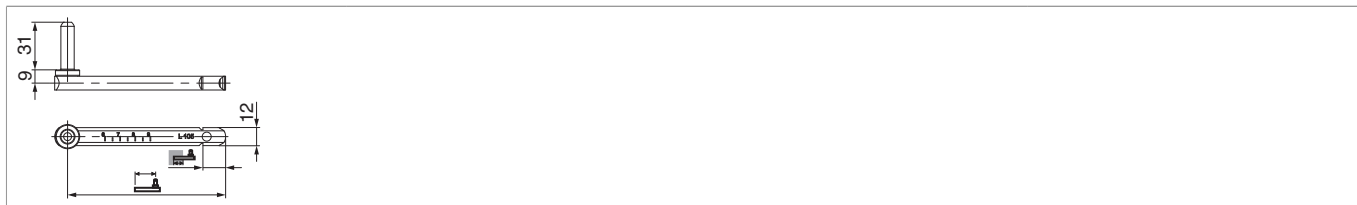

							
black-S	L125	70 - 110	15	125	55	20	209471¹⁾

¹⁾ Given minimum shutter pin insertion depths apply only to installation on timber (refer to section 1.5)!